



Bobcat®



 www.ryc.com.ec

S570

Capacidad de
Levantamiento

1,950 lbs. (885kg.)
2,100 lbs. (952kg.) (CW)*

Peso operativo

6,395 lbs. (2,900kg.)

Potencia Neta

61hp, Turbo diesel



 **S.E.R.** | SERVICIO
ESPECIALIZADO
RYC

S570 - Especificaciones

Performance

Tipping load (ISO 14397-1)	3,900 lbs. (1,772 kg.)
Capacidad de carga	1,950 lbs. (885 kg.)
Capacidad de carga + contra pesos	2,100 lbs. (955 kg.)
Pump capacity	64.7 L/min
Pump capacity (with high flow-option)	101.1 L/min
System relief at quick couplers	23.8-24.5 MPa
Max. travel speed (high range-option)	17.3 km/h
Max. travel speed (low range)	11.8 km/h

Engine

Make/Model	Kubota/V2407 (iT4)
Fuel	Diesel
Cooling	Liquid
Power at 2700 RPM (SAE J1995 Gross)	61.0 HP
Torque at 1425 RPM (SAE J1995 Gross)	200.7 Nm
Number of cylinders	4
Displacement	2600 cm ³
Fuel tank	93.7 L

Weights

Operating weight	2900 kg
Shipping weight without bucket	2560 kg

Controls

Vehicle steering	Direction and speed controlled by two hand levers or Selectable Joystick Controls (SJC)
Loader hydraulics tilt and lift	Foot pedals or optional Selectable Joystick Controls (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever

Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

Standard Features

10x16.5, 10-ply, Heavy duty tyres	Manual
Cushioned lift and tilt cylinders	Lift arm support
Bobcat Interlock Control System (BICS)	Parking brake
Bob-Tach™ frame	Seat bar
Operator cab ¹	Turbo-charger with approved spark arrestor
Electrically activated proportional front auxiliary hydraulics	Work lights, front and rear
Engine/hydraulics system shutdown	Back-up alarm
Standard seat	

1. Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471; Falling Object Protective Structure (FOPS) - meets requirements of SAE-J1043 and ISO 3449, Level I

Options


Deluxe operator cab with windows	Strobe
Selectable Joystick Controls (SJC)	Radio
2 speed	Road kit
Deluxe instrument panel	10x16.5, 10-ply, Heavy duty tyres, offset rims
Deluxe pressurized cab with heating	10x16.5, 10-ply, Severe duty tyres
Deluxe pressurized cab with HVAC	10x16.5, Solid flex tyres
High-flow hydraulics	31x12-16.5, 10-ply, Super flotation tyres
Power Bob-Tach™	Hydraulic bucket positioning (including ON/OFF switch)
Beacon	High-back adjustable suspension seat



Bobcat is a Doosan company.

Doosan is a global leader in construction equipment, power and water solutions, engines, and engineering proudly serving customers and communities for more than a century. Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries.

©2020 Bobcat Company. All rights reserved.

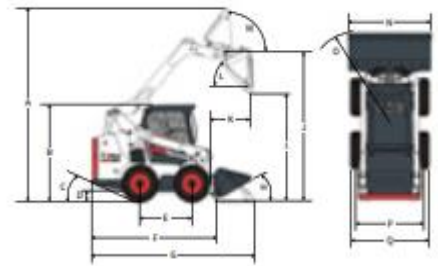

(A)	3901.0 mm	(J)	3023.0 mm
(B)	1972.0 mm	(K)	828.0 mm
(C)	24.2°	(L)	42.0°
(D)	185.0 mm	(M)	97.0°
(E)	1082.0 mm	(N)	1727.0 mm
(F)	2657.0 mm	(O)	2024.0 mm
(G)	3378.0 mm	(P)	1374.0 mm
(H)	30.0°	(Q)	1643.0 mm
(I)	2319.0 mm		

Attachment

Angle broom	Pallet fork
Auger	Planer
Backhoe	Rock bucket
Bale fork	Scarifier
Blades — box, dozer, snow, snow v-blade	Scraper
Breaker, hydraulic	Seeder
Brush saw	Snow pusher
Brushcat™ rotary cutter	Snowblower
Bucket adapter	Sod layer
Buckets	Soil conditioner
Chipper	Spreader
Combination bucket mixer	Stabilizer, rear
Concrete pump	Steel tracks
Digger	Stump grinder
Drop hammer	Sweeper
Dumping hopper	Three-point hitch adapter
Flail cutter	Tiller
Grader	Tilt-Tatch™
Grapples — farm / utility, industrial, root	Tree spade
Landplane	Trench compactor
Landscape rake	Trencher
Laser equipment	Utility fork
Mower	Utility frame
Packer wheel	Vibratory roller
	Water kit
	Wheel saw
	Whisker broom



Bobcat®

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of Bobcat units may show other than standard equipment.