



**Bobcat**®

**ZERO-TURN MOWERS**

ZT7000 | ZT6100 | ZT6000 | ZS4000

ZT3500 | ZT3000 | ZT2000

**BRING TOUGH  
TO TURF**

[BOBCAT.COM](http://BOBCAT.COM)



# A WHOLE DIFFERENT ANIMAL COMES TO TURF

From maintaining a new lawn to building extravagant parks, Bobcat® equipment is designed to meet project deadlines and keep crews productive and profitable. We build equipment you can rely on for performance, toughness, and versatility.

**WE'RE BRINGING TOUGH TO TURF.**

Meet the ALL-NEW lineup of Bobcat zero-turn mowers. Built to give you a professional edge, engineered to last longer, and work harder.





# ENGINEERED TO KEEP YOU ON TOP

Innovation drives every decision we make, down to the finest details – like our bolt-on Air-Gap baffle system, which accelerates airflow for efficiency in our AirFX™ cutting deck. This system eliminates negative-pressure pockets and lifts grass up to the cutting blade for precision cutting and perfectly manicured lawns.

## RUGGED DURABILITY WITH THE TUFDECK™ PRO AND TUFDECK™ CUTTING SYSTEMS

Tough and reliable for a perfectly manicured finish – every time:

- Steel-fabricated and cast-aluminum spindles for reliability
- Constructed with heavy-gauge, fabricated steel
- Improved vacuum lift
- Easily replaceable, bolt-on front baffles

## SUPERIOR DISCHARGE WITH DURADECK™ CUTTING SYSTEMS

Tough enough to handle everything commercial jobs dish out:

- Double-Wave™ bolt-on baffles to increase airflow throughout the deck
- Even clipping dispersal
- Adjustable front lip for optimized cutting on varying conditions and grass types (available on the ZS4000 36-inch mower)
- Limited lifetime deck, deck cradle, and engine deck warranty
- Steel-fabricated or cast-aluminum spindles (varies with model)

## OPTIMUM MOWING WITH BULLNOSE AIRFX™ CUTTING SYSTEMS

A full-scale system designed to keep you a cut above the rest:

- Deeper profile for improved vacuum lift
- Newly engineered, bolt-on, replaceable, patent pending Air-Gap baffles for more efficient airflow and enhanced serviceability
- Bullnose design stands grass up before it reaches the mower blades
- Cast-iron or steel-fabricated spindles for increased durability (varies with model)
- Even clipping dispersal
- Improved deck cleanliness
- Adjustable front lip for optimized cutting on varying conditions and grass types

**DEEP DECK DESIGN** with patent pending Air-Gap baffles increases airflow, delivers a pristine cut, and provides a cleaner deck at the end of the day.

## CLEAN FINISH

Powerful airflow aggressively shoots clippings out the extra-large discharge chute





# MEAN BUSINESS

Built to make your bottom line, the ZT7000 is the peak of toughness and best-in-the-business performance. And with mowing speeds of up to 13 mph, you can knock out quality results job after job after job.

## ENGINEERING

### HIGH-PERFORMANCE ENGINE

A Kawasaki® FX1000V or B&S Vanguard® EFI engine delivers major commercial-grade strength.

### COMMERCIAL-GRADE TRANSMISSION

Rugged Hydro-Gear® ZT-5400 hydrostatic transaxles feature a two-speed foot pedal for transport speeds up to 19 mph.

### HIGH-CAPACITY DUAL FUEL TANKS

Equipped with dual, 15-gallon fuel tanks.

### BULLNOSE AIRFX™ DECK

61- or 72-inch bullnose AirFX deck with Air-Gap baffles offers efficient airflow and superior vacuum lift while rugged, cast-iron spindles with double-row bearings assure reliable performance.

## WHAT YOU GET

All the pro-grade power you need – would be an understatement. Get more done, more efficiently.

Maximum output torque with smooth, steady operation even at your fastest speeds.

Fill up your schedule – without any shortage of fuel to stop you.

A unique bullnose design stands grass up before it reaches the mower blades for an unmatched, quality cut.



# ZT7000

### COMFORT COMMAND CENTER

An extra-tall suspension seat, almond-shaped handles, anti-vibration footplate and smooth, responsive controls provide intuitive operation.

### SWING AWAY BUMPER AND HITCH ATTACHMENT

The rotating bumper – with the additional hitch system included – offers fast access to internal components, making tune-ups more efficient.

### HIGH-SPEED MOWING

Transport speeds up to 19 mph and cutting speeds up to 13 mph allow for increased productivity.

### 15-INCH NO-FLAT CASTER WHEELS

Reliable wheels reduce downtime and improve cut.

**2000**  
HOURS

**BUMPER TO BUMPER**

**WARRANTY**

## BRING TOUGH TO TURF



# IT'S ONE WORD: TOUGH.

Built for any turf pro who demands as much from their machine as they put into their business. The ZT6100 has the power, speed and the fuel capacity you need for hours of uncompromising mowing power.

## ENGINEERING

### POWERFUL ENGINE PERFORMANCE

Kawasaki® FX series engine options, including FX850V and FX850V EFI, deliver dependable power and performance.

### COMMERCIAL-GRADE TRANSMISSION

Innovative Hydro-Gear® ZT-4400 transaxles are reliable and versatile.

### DURABLE DUAL-TUBED FRAME

A heavy-duty, dual-tubed frame design provides maximum durability.

### BULLNOSE AIRFX™ DECK

The deep-profile, 61-inch, bullnose AirFX deck is equipped with rugged, cast-iron spindles with double-row bearings and patent pending Air-Gap baffles.

## WHAT YOU GET

Pro-grade power is at your command – for whenever the job demands it.

Shift into high gear with maximum output torque and ground speeds up to 12 mph.

Mow through tough jobs with a frame that's engineered to withstand just about anything.

Delivers a premium, quality cut with innovative technology that lifts grass to the cutting blade for a cleaner cut.

## ZT6100

### COMFORT COMMAND CENTER

A deluxe suspension seat, almond-shaped handles and smooth, responsive controls provide intuitive operation.

### SWING AWAY BUMPER AND HITCH ATTACHMENT

The rotating bumper – with the additional hitch system included – offers fast access to internal components, making tune-ups more efficient.

### DUAL FUEL TANKS

Armed with all-new, 15-gallon capacity, dual fuel tanks, the ZT6100 keeps operators at peak productivity.



**2000 HOURS** BUMPER TO BUMPER WARRANTY

BRING TOUGH TO TURF



# BUILT TO WORK.

Versatility and dependability defined, the ZT6000 will satisfy the toughest customers and give your crew something to fight over.

## ENGINEERING

### PRECISION-DESIGNED ENGINE

Kawasaki® FX series engine options, including FX801V, deliver dependable power and performance.

### COMMERCIAL-GRADE TRANSMISSION

Innovative Hydro-Gear® ZT-4400 transaxles are reliable and versatile.

### DURABLE, DUAL-TUBED FRAME

A heavy-duty, dual-tubed frame design provides maximum durability.

### BULLNOSE AIRFX™ DECK

The deep-profile, 52- or 61-inch, bullnose AirFX deck is equipped with rugged, cast-iron spindles with double-row bearings and patent pending Air-Gap baffles.

## WHAT YOU GET

The power and performance you need to tackle the toughest jobs day after day.

Step on the gas and step up your game with maximum ground speeds to get more jobs done faster.

Durability to keep you out on the job and out of the shop.

An unmatched quality that lifts grass up so steel blades can cut it down – giving you a cleaner cut and better lawn.

## ZT6000

### COMFORT COMMAND CENTER

A deluxe suspension seat, almond-shaped handles and smooth, responsive controls provide intuitive operation.

### DUAL FUEL TANKS

Armed with all-new, 15-gallon capacity, dual fuel tanks.

### INCREASED PRODUCTIVITY

Ground speeds up to 12 mph.

**2000**  
HOURS

**BUMPER TO BUMPER**

**WARRANTY**



**BRING TOUGH TO TURF**



# OUTWORK. OUTDO. OUTMANEUVER.

Stability. Agility. Profitability. With a compact size, extra ground clearance and large drive tires, the ZS4000 gets over and around obstacles and on to the next job.

## ENGINEERING

### POWERFUL ENGINE PERFORMANCE

Equipped with the Kawasaki® FX series or FT series EFI engine for power and performance.

### TOOL-FREE CONTROLS

An innovative, tool-free control design offers smooth, dampened controls with tool-free, adjustable tracking.

### OPERATOR-STATION DESIGN

Operator-station design and in-frame fuel tank provide excellent "center of mass" stability.

### BULLNOSE AIRFX™ DECK

Ruggedly equipped with a heavy-duty 48-, 52- or 61-inch AirFX deck with Air-Gap baffles bolt-on cast iron spindles.\*

\*DuraDeck™ cutting system available on the 36-inch mower.

## WHAT YOU GET

Efficiently power through the workday with power capabilities that let you take on jobs of all sizes and demands – easily.

Maintain total control – right at your fingertips.

Easily traverse hills and slopes with stand-on stability and agility on uneven ground.

Cut the toughest, tallest grass down to size with a cutting deck that features innovative technology that lifts grass to the cutting blade for a cleaner cut.

## ZS4000



### OPERATOR PAD

Maintain your ZS4000 with the tethered, easily removeable operator pad.

### ANTI-VIBRATION PLATFORM

Flip-up vibration damped platform reduces vibration and fatigue for a smooth, comfortable ride.

### HG ZT-3100 OR 3400 HYDROSTATIC TRANSMISSION

Provides all the torque you need for long hours and smooth operation.

**2000**  
HOURS

**BUMPER TO BUMPER**  
WARRANTY

## BRING TOUGH TO TURF





# YOUR TURF. YOUR TERMS.

We built the ZT3500 to deliver commercial-grade durability and performance at an affordable price. Convenient maintenance and all-day mowing comfort make the ZT3500 the perfect machine for anyone ready to take on the toughest turf.

## ENGINEERING

### HIGH-PERFORMANCE ENGINE

Equipped with a powerful Kawasaki® FX series engine.

### PRO-GRADE TRANSMISSION

Superior transmission capabilities with the durable Hydro-Gear® ZT-3400 hydrostatic transaxles.

### QUICK GROUND SPEEDS

Productive ground speeds up to 10 mph.

### DUAL FUEL TANKS

Rugged, roto-molded, dual fuel tanks with a 7.8-gallon capacity.

## WHAT YOU GET

Inexhaustible power comes standard, allowing you to mow down any challenge with ease.

Rely on smooth and steady mowing power, even at your fastest speeds.

Make quick work out of big jobs, especially when your job depends on getting more done in a day.

Extra fuel capacity lets you stay focused on what's most important – the turf.

# ZT3500

### OPTIMAL USER COMFORT

A high-backed mechanical suspension seat and ergonomic controls keep you comfortable all day long.

### 23-INCH DRIVE TIRES

Large tires offer great control and a smooth ride.

### TUFDECK™ PRO CUTTING SYSTEM

The system features professional-grade, cast-aluminum spindle assemblies.



**1000**  
HOURS

**BUMPER TO BUMPER**

**WARRANTY**

## BRING TOUGH TO TURF





# BUILT FOR THE TOUGHEST CUSTOMER: ME

You're doing this because you love it. Pride in a job well done. That's the ZT3000 sweet spot. Delivering a quality cut no matter how many acres you maintain.

## ENGINEERING

### ENGINE BUILT FOR PERFORMANCE

Reliable mowing power with the Kawasaki® FT series engine.

### COMMERCIAL-GRADE TRANSMISSION

Delivering precision with the Hydro-Gear® ZT-3100 hydrostatic transaxles.

### ROBUST FUEL TANK

Rugged, roto-molded, impact-resistant fuel tank with a 3.8-gallon capacity.

### TOUGH MOWER DECKS

48-, 52- or 61-inch TufDeck™ Pro cutting system features professional-grade, welded cast-aluminum spindles.

## WHAT YOU GET

Dependable engine performance, built for the pros and those who want to mow like them.

Smooth operation and maneuverability to tackle turf faster.

Get the job done without having to worry about refueling.

Durability meets ingenuity in mower deck design.

# ZT3000


**COMPLETE COMFORT**  
Ergonomically engineered controls and high-backed spring suspension seat.

**SOLID, TUBULAR FRAME**  
Constructed with a lightweight, durable, 1.5x2.5-inch steel tubed frame.



**1000  
HOURS**

**BUMPER TO BUMPER  
WARRANTY**

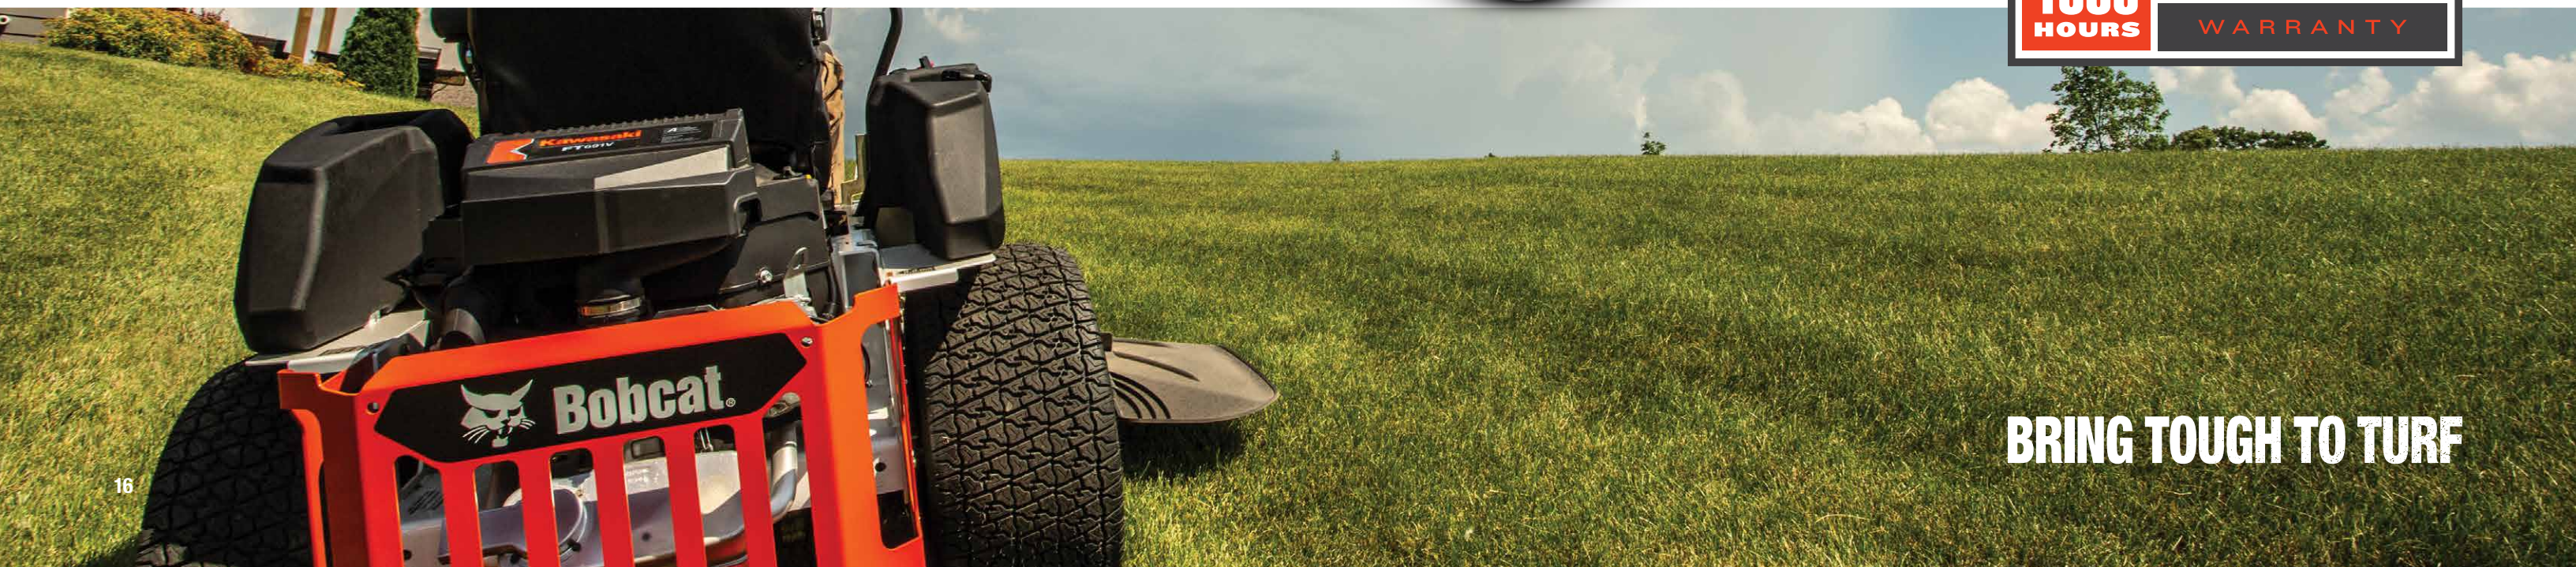

## BRING TOUGH TO TURF



# MY HOUSE IS WHERE I SLEEP, MY YARD IS WHERE I LIVE.

The ZT2000 brings more commercial features than other zero-turn mower in the same price range. It's the ZT for people like you who want durability and a professional cut at an affordable price.

## ENGINEERING

### ENGINE PERFORMANCE

Equipped with Kawasaki® FR series engine for a powerful, pro-grade performance.

### COMMERCIAL-GRADE TRANSMISSION

Hydro-Gear® ZT-2800 hydrostatic transaxles for heavy-duty output torque with productive ground speeds up to 7 mph.

### COMMERCIAL CUTTING CAPABILITY

42-, 48- and 52-inch TufDeck™ cutting system has durable, steel-fabricated spindle assemblies.

## WHAT YOU GET

More power every time you fire up the mower – job after job.

Innovative transmission engineering delivers smooth and simple operation.

A mower built to handle the toughest jobs.

# ZT2000



**ALL-DAY FUEL CAPACITY**  
Impact-resistant, 3.8-gallon capacity keeps you mowing.

**STURDY STEEL FRAME**  
The 1.5x2.5-inch steel-tubed frame is lightweight and rugged.

**500  
HOURS**

**BUMPER TO BUMPER  
WARRANTY**

## BRING TOUGH TO TURF







## ZT7000

MODEL NUMBER	9997010	9997011	9997012	9997013
<b>ENGINE</b>				
Model	Kaw FX1000V		B&S Vanguard EFI	
Displacement	60.9 cu. in. (999 cc)		60.5 cu. in. (993 cc)	
Fuel Capacity	15.0 gal. (56.7 L)			
Air Filter	Canister Air Filter			
<b>ELECTRICAL</b>				
Charging System	15 amp			
Clutch	250 lbf. (1112 N)			
<b>DECK</b>				
Mower Deck	AirFX™ Cutting System			
Leading Edge	Adjustable, Front Lip Standard			
Width	61.0 in. (1549 mm)	72.0 (1828 mm)	61.0 in. (1549 mm)	72.0 (1828 mm)
Adjustable Anti-Scalp Rollers	6	7	6	7
Cutting Height	1.0-5.5 in. (25-139 mm)			
Blade Tip Speed	18,500 fpm @ 3550 Engine rpm	18,152 fpm @ 3550 Engine rpm	18,500 fpm @ 3550 Engine rpm	18,152 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer			
<b>FRAME</b>				
Front & Rear	Welded, 0.25 in., 7-gauge Steel; 1.5 x 2.5 in. Steel Tubing			
Machine Length	87.0 in. (2209 mm)			
Machine Weight	1500 wet lb.	1541 wet lb.	1500 wet lb.	1541 wet lb.
<b>TRANSMISSION</b>				
Type	HG ZT-5400 2-Speed Hydrostatic Transaxles			
Pump Displacement	0.9 cu. in. (16 cc)			
Oil Capacity	1.4 gal. (5.9 qt.) each			
Forward Speed	0-19.0 mph (0-30.5 km/hr.)*			
Reverse Speed (mph)	0-7.5 mph (0-12.0 km/hr.)**			
<b>WHEELS</b>				
Drive Wheel Size	26 x 12.0-12			
Front Caster Wheel Size	15 x 6.5-6, No-Flat			
Caster Arm Attachment	Bolt-On			
<b>SEAT</b>				
Description	Extra-High Back, Full Mechanical Suspension Seat			
Fore-Aft Adjustment	Seat Slide Lever			
<b>WARRANTY</b>	3-year / 2,000 hour Standard Warranty			

\* 0-13 mph cutting; 13-19 mph transport  
\*\* 5-7.5 mph transport

## SPECS



## ZT6100

MODEL NUMBER	9996012	9996013
<b>ENGINE</b>		
Model	Kaw FX850V	Kaw FX850 EFI
Displacement	52.0 cu. in. (852 cc)	
Fuel Capacity	15.0 gal. (56.7 L)	
Air Filter	Canister Air Filter	
<b>ELECTRICAL</b>		
Charging System	15 amp	
Clutch	225 lbf. (1000 N)	
<b>DECK</b>		
Mower Deck	AirFX™ Cutting System	
Leading Edge	Adjustable, Front Lip Standard	
Width	61.0 in. (1549 mm)	
Adjustable Anti-Scalp Rollers	6	
Cutting Height	1.0-5.5 in. (25-139 mm)	
Blade Tip Speed	18,500 fpm @ 3550 Engine rpm	
Discharge Chute	Flexible Molded Polymer	
<b>FRAME</b>		
Front & Rear	Welded, 0.25 in., 7-gauge Steel; 1.5 x 2.5 in. Steel Tubing	
Machine Length	83.0 in. (2108 mm)	
Machine Weight	1464 wet lb.	
<b>TRANSMISSION</b>		
Type	HG ZT-4400 Hydrostatic Transaxles	
Pump Displacement	0.7 cu. in. (12 cc)	
Oil Capacity	1.1 gal. (4.5 qt.) each	
Forward Speed	0-12.0 mph (0-19.3 km/hr.)	
Reverse Speed (mph)	0-4.0 mph (0-6.4 km/hr.)	
<b>WHEELS</b>		
Drive Wheel Size	24 x 12.0-12	
Front Caster Wheel Size	13 x 6.5-6	
Caster Arm Attachment	Bolt-On	
<b>SEAT</b>		
Description	High-Back, Full-Mechanical Suspension Seat	
Fore-Aft Adjustment	Seat Slide Lever	
<b>WARRANTY</b>	3-year / 2,000 hour Standard Warranty	





## ZT6000

MODEL NUMBER	9996010	9996011
<b>ENGINE</b>		
Model	Kaw FX801V	
Displacement	52.0 cu. in. (852 cc)	
Fuel Capacity	15 gal. (56.7 L)	
Air Filter	Canister Air Filter	
<b>ELECTRICAL</b>		
Charging System	15 amp	
Clutch	225 lbf. (1000 N)	
<b>DECK</b>		
Mower Deck	AirFX™ Cutting System	
Leading Edge	Adjustable, Front Lip Standard	
Width	52 in. (1320 mm)	61 in. (1541 mm)
Adjustable Anti-Scalp Rollers	6	
Cutting Height	1.0-5.5 in. (25-139 mm)	
Blade Tip Speed	18,586 fpm @ 3550 Engine rpm	18,500 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	
<b>FRAME</b>		
Front & Rear	Welded, 0.25 in., 7-gauge Steel; 1.5 x 2.5 in. Steel Tubing	
Machine Length	83.0 in. (2108 mm)	
Machine Weight	1371 wet lb.	1421 wet lb.
<b>TRANSMISSION</b>		
Type	HG ZT-4400 Hydrostatic Transaxles	
Pump Displacement	0.7 cu. in. (12 cc)	
Oil Capacity	1.1 gal. (4.5 qt.) each	
Forward Speed	0-12.0 mph (0-19.3 km/hr.)	
Reverse Speed (mph)	0-4.0 mph (0-6.4 km/hr.)	
<b>WHEELS</b>		
Drive Wheel Size	24 x 10.5-12	
Front Caster Wheel Size	13 x 6.5-6	
Caster Arm Attachment	Bolt-On	
<b>SEAT</b>		
Description	High-Back, Full-Mechanical Suspension Seat	
Fore-Aft Adjustment	Seat Slide Lever	
<b>WARRANTY</b>	3-year / 2,000 hour Standard Warranty	



## SPECS

## ZS4000

MODEL NUMBER	9994001	9994002	9994003	9994004
<b>ENGINE</b>				
Model	Kaw FX600V	Kaw FX651V	Kaw FT730V EFI	Kaw FT730V EFI
Displacement	36.7 cu. in. (603 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)
Fuel Capacity	5.1 gal. (19.3 L)	6.5 gal. (24.6 L)	6.5 gal. (24.6 L)	6.5 gal. (24.6 L)
Air Filter	Dual Element			
<b>ELECTRICAL</b>				
Charging System	15 amp			
Clutch	125 lbf. (556 N)	200 lbf. (889 N)	200 lbf. (889 N)	200 lbf. (889 N)
<b>DECK</b>				
Mower Deck	DuraDeck™ Cutting System	AirFX™ Cutting System	AirFX™ Cutting System	AirFX™ Cutting System
Leading Edge	Adjustable, Front Lip Standard			
Width	36 in. (914 mm)	48 in. (1219 mm)	52 in. (1320 mm)	61 in. (1549 mm)
Adjustable Anti-Scalp Rollers	3	4	4	7
Cutting Height	1.5-4.5 in. (38-114 mm)			
Blade Tip Speed	17,600 fpm @ 3550 Engine rpm	17,800 fpm @ 3550 Engine rpm	18,586 fpm @ 3550 Engine rpm	18,500 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer			
<b>FRAME</b>				
Front & Rear	Welded 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing			
Machine Length	64.0 in. (1625 mm)			
Machine Weight	800 wet lb.	961 wet lb.	991 wet lb.	1028 wet lb.
<b>TRANSMISSION</b>				
Type	HG ZT-3100 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles
Pump Displacement	0.6 cu. in. (10 cc)	0.7 cu. in. (12 cc)	0.7 cu. in. (12 cc)	0.7 cu. in. (12 cc)
Oil Capacity	1.0 gal. (4 qt)			
Forward Speed	0-9.0 mph (0-14.4 km/hr.)	0-10.5 mph (0-16.8 km/hr.)	0-10.5 mph (0-16.8 km/hr.)	0-10.5 mph (0-16.8 km/hr.)
Reverse Speed (mph)	0-3.5 mph (0-5.6 km/hr.)			
<b>WHEELS</b>				
Drive Wheel Size	20 x 8.0-10	23 x 8.5-12	23 x 10.5-12	23 x 10.5-12
Front Caster Wheel Size	11 x 6.0-5	13 x 6.5-6	13 x 6.5-6	13 x 6.5-6
Caster Arm Attachment	Bolt-On			
<b>OPERATOR PLATFORM</b>				
Adjustment	Flip Up and Latch			
Rider Pad	Tethered, Removable for Service			
Vibration Isolation	Dampened			
<b>WARRANTY</b>	3-year / 2,000 hour Standard Warranty			





**ZT3500**

MODEL NUMBER	9993501	9993502	9993503
<b>ENGINE</b>			
Model	Kaw FX651V	Kaw FX691V	Kaw FX730V
Displacement	44.3 cu.ci. (726 cc)		
Fuel Capacity	7.8 gal. (29.5 L)		
Air Filter	Dual-Stage Canister		
<b>ELECTRICAL</b>			
Charging System	15 amp		
Clutch	125 lbf. (556 N)		
<b>DECK</b>			
Mower Deck	TufDeck™ Pro 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts		
Width	48.0 in. (1219 mm)	52.0 in. (1320 mm)	61.0 in. (1549 mm)
Adjustable Anti-Scalp Rollers	3	3	7
Cutting Height	1.5-4.8 in. (38-121 mm)		
Blade Tip Speed	17,365 fpm @ 3550 Engine rpm	18,142 fpm @ 3550 Engine rpm	18,809 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer		
<b>FRAME</b>			
Front & Rear	Welded, 7-gauge Steel; 1.5 x 2.5 in. Steel Tubing		
Machine Length	76.0 in. (1930 mm)	79.0 in. (2006 mm)	
Machine Weight	773 wet lb.	789 wet lb.	832 wet lb.
<b>TRANSMISSION</b>			
Type	HG ZT-3400 Hydrostatic Transaxles		
Pump Displacement	0.7 cu. in. (12 cc)		
Oil Capacity	1.0 gal. (4 qt)		
Forward Speed	0-10.0 mph (0-16.0 km/hr.)		
Reverse Speed (mph)	0-3.5 mph (0-5.6 km/hr.)		
<b>WHEELS</b>			
Drive Wheel Size	23 x 10.5-12		
Front Caster Wheel Size	13 x 6.5-6		
Caster Arm Attachment	Welded to Frame		
<b>SEAT</b>			
Description	High-Back, Full-Mechanical Suspension Seat		
Fore-Aft Adjustment	Seat Slide Lever		
<b>WARRANTY</b>	3-year / 1,000 hour Standard Warranty		



**ZT3000**

MODEL NUMBER	9993001	9993002	9993003
<b>ENGINE</b>			
Model	Kaw FT651V	Kaw FT691V	Kaw FT730V
Displacement	44.3 cu.ci. (726 cc)		
Fuel Capacity	3.8 gal. (14.3 L)		
Air Filter	Dual Element		
<b>ELECTRICAL</b>			
Charging System	15 amp		
Clutch	125 lbf. (556 N)		
<b>DECK</b>			
Mower Deck	TufDeck™ Pro 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts		
Width	48.0 in. (1219 mm)	52.0 in. (1320 mm)	61.0 in. (1549 mm)
Adjustable Anti-Scalp Rollers	3	3	7
Cutting Height	1.5-4.8 in. (38-121 mm)		
Blade Tip Speed	17,365 fpm @ 3550 Engine rpm	18,142 fpm @ 3550 Engine rpm	18,809 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer		
<b>FRAME</b>			
Front & Rear	Welded, 7-gauge Steel; 1.5 x 2.5 in. Steel Tubing		
Machine Length	76.0 in. (1930 mm)		
Machine Weight	758 wet lb.	774 wet lb.	817 wet lb.
<b>TRANSMISSION</b>			
Type	HG ZT-3100 Hydrostatic Transaxles		
Pump Displacement	0.6 cu. in. (10 cc)		
Oil Capacity	1.0 gal. (4 qt)		
Forward Speed	0-8.0 mph (0-12.8 km/hr.)		
Reverse Speed (mph)	0-3.5 mph (0-5.6 km/hr.)		
<b>WHEELS</b>			
Drive Wheel Size	22 x 11.0-10		
Front Caster Wheel Size	13 x 6.5-6		
Caster Arm Attachment	Welded to Frame		
<b>SEAT</b>			
Description	High-Back, EVC and Spring Suspension Seat		
Fore-Aft Adjustment	Seat Slide Lever		
<b>WARRANTY</b>	3-year / 1,000 hour Standard Warranty		



**ZT2000**

MODEL NUMBER	9992001	9992002	9992003
<b>ENGINE</b>			
Model	Kaw FR651V	Kaw FR651V	Kaw FR691V
Displacement	44.3 cu.ci. (726 cc)		
Fuel Capacity	3.8 gal. (14.3 L)		
Air Filter	Dual Element		
<b>ELECTRICAL</b>			
Charging System	15 amp		
Clutch	105 lb. (556 N)		
<b>DECK</b>			
Mower Deck	TufDeck™ 7-gauge Top; 7-gauge Side Skirts	TufDeck™ 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts	
Width	42.0 in. (1066 mm)	48.0 (1219 mm)	52.0 (1320 mm)
Adjustable Anti-Scalp Rollers	2	3	3
Cutting Height	1.5-4.8 in. (38-121 mm)		
Blade Tip Speed	18,809 fpm @ 3550 Engine rpm	17,365 fpm @ 3550 Engine rpm	18,142 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer		
<b>FRAME</b>			
Front & Rear	Welded, 7-gauge Steel; 1.5 x 2.5 in. Steel Tubing		
Machine Length	76.0 in. (1930 mm)		
Machine Weight	684 wet lb.	736 wet lb.	752 wet lb.
<b>TRANSMISSION</b>			
Type	HG ZT-2800 Hydrostatic Transaxles		
Pump Displacement	0.6 cu. in. (10 cc)		
Oil Capacity	1.0 gal. (4 qt)		
Forward Speed	0-7.0 mph (0-11.2 km/hr.)		
Reverse Speed (mph)	0-3.0 mph (0-4.8 km/hr.)		
<b>WHEELS</b>			
Drive Wheel Size	20 x 8.0-10	20 x 10.0-10	
Front Caster Wheel Size	11 x 6.0-5		
Caster Arm Attachment	Welded to Frame		
<b>SEAT</b>			
Description	High-Back, Spring Suspension Seat		
Fore-Aft Adjustment	Seat Slide Lever		
<b>WARRANTY</b>	3-year / 500 hour Standard Warranty		



# WARRANTY THE BEST FOR YOUR BUSINESS

You rely on your mowers – whether it's to get work done or generate business income. Either way, your mowers are an investment and when you buy a Bobcat zero-turn mower, you get an industry-leading warranty that covers everything – bumper-to-bumper, up to 2,000 hours.

## PROTECTION PLUS EXTENDED WARRANTY

Pick the plan that's right for you with extended warranty options up to 60 months and 2,500 hours.

MODEL	STANDARD WARRANTY		EXTENDED WARRANTY			
	MONTHS	HOURS	MONTHS	HOURS	MONTHS	HOURS
ZT3500	36	1,000	48	1,100	60	1,200
ZS4000	36	2,000	48	2,250	60	2,500
ZT6000	36	2,000	48	2,250	60	2,500
ZT6100	36	2,000	48	2,250	60	2,500
ZT7000	36	2,000	48	2,250	60	2,500



## PARTS AND ACCESSORIES

Shop by Bobcat model to get the parts and accessories you need.

	ZT7000	ZT6100	ZT6000	ZS4000	ZT3500	ZT3000	ZT2000
Mulching Baffle Kit: Eliminator Blades	61"	✓	✓	✓	✓	✓	48", 52"
Mulching Baffle Kit: Medium Lift Blades							42"
Eco Plate	✓	✓	✓	✓	✓	✓	✓
Grass Catcher: Poly-Dump, 3.75- or 5-Bushel	61"	✓	✓	✓	✓	✓	✓
Weight Kit				✓			
Seat Suspension Kit						✓	✓
BOSS-VAC Pro 12-Bushel Collection System	✓	✓	✓				
BOSS-VAC 8-Bushel Collection System					✓		
Deck Striping Kit	✓	✓	✓	48", 52", 61"	✓	✓	48", 52"
ZT Hitch Kit			✓		✓	✓	
No-Flat Caster Wheel Options		✓	✓	✓	✓	✓	✓
Magnetic Light Kit, 12V	✓	✓	✓	✓	✓	✓	✓
Light Kit, Footplate		✓	✓				
ROPS Kit						✓	✓
ROPS Canopy Kit	✓	✓	✓		✓	✓*	✓*

\*ROPS Kit required.





# YOU ARE ONE TOUGH ANIMAL.®

Everything we put into Bobcat equipment is designed to make more of whatever you bring to the job. Whether it's strength, versatility, speed or agility, it's built around you.

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Where applicable, dimensions are in accordance with ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for mini track loaders. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.



**Bobcat is a Doosan company.** Doosan is a global leader in construction equipment, power and water solutions, engines, and engineering, proudly serving customers and communities for more than a century. Bobcat® and the Bobcat logo are trademarks of Bobcat Company in the United States and various other countries. ©2020 Bobcat Company. All rights reserved.

Hydro-Gear® is a registered trademark of Hydro-Gear Limited Partnership AF.  
Kawasaki® is a registered trademark of KAWASAKI HEAVY INDUSTRIES, LTD.  
Vanguard® is a trademark of Briggs & Stratton Corporation.

**Doosan Bobcat Korea Co., Ltd.**

[www.bobcat.com](http://www.bobcat.com)



**Bobcat®**

***One Tough Animal.***